

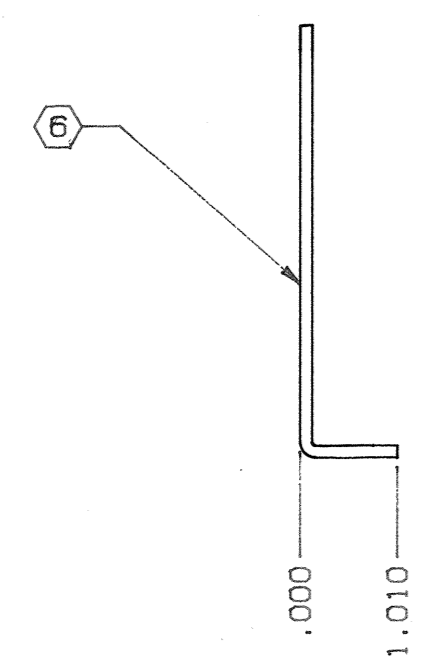


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

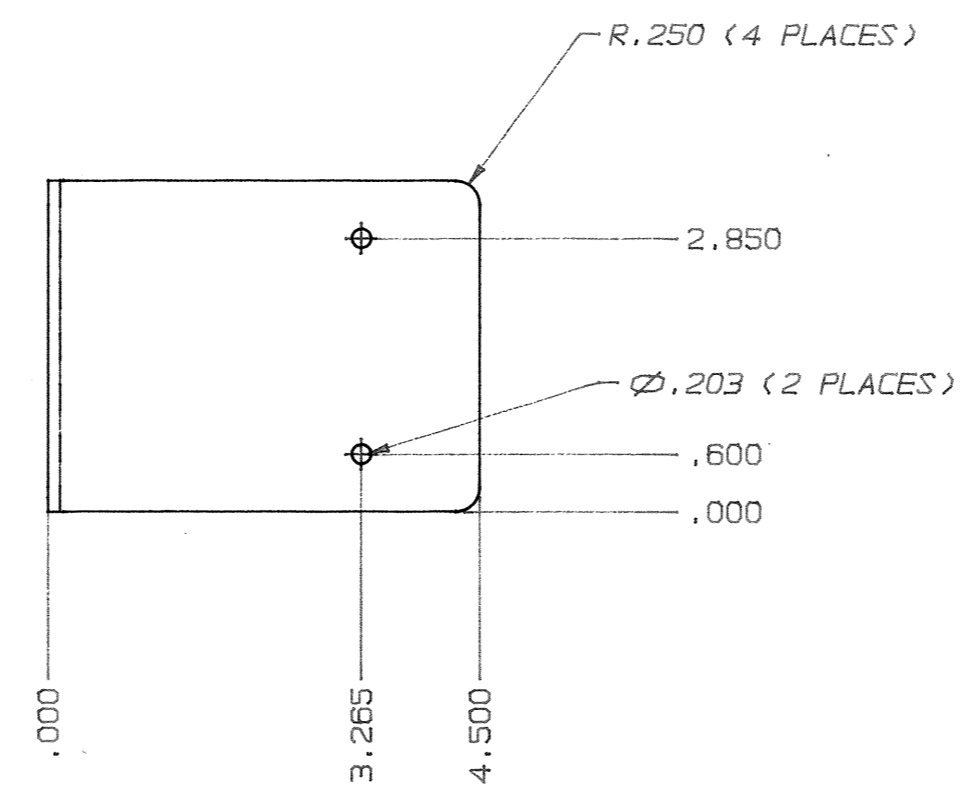

← GRAIN DIRECTION →

Ø.171
THRU, CSK 82 DEG.
TO .340 DIA. (2 PLACES)
FAR SIDE

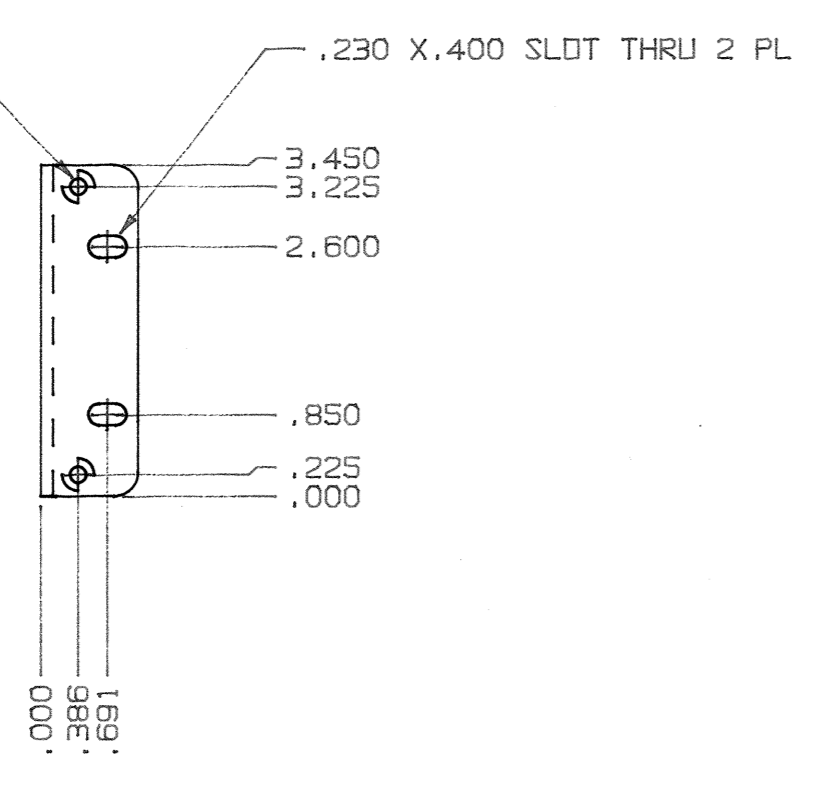

- NOTES:
- 1) ALL DIMENSIONS ARE IN INCHES
 - 2) TOL +/- .010
 - 3) USE MINIMUM RADII ON ALL BENDS
 - 4) MATERIAL: .125 ALUMINUM (8 GA)
 - 5) FINISH: GRAIN AND BLACK ANODIZE
 - 6) RUBBER OR METAL STAMP ON THIS SURFACE IN .12 - .19 HIGH CHARACTERS: 7-00565-720.REVO
 - 7) TWO (2) REQUIRED PER ASSEMBLY

<i>STANFORD RESEARCH SYSTEMS, Inc.</i>			
1290-D REAMWOOD AVENUE SUNNYVALE, CA 94089 PHONE: (408) 744-9040 FAX: 4087449049 TELEX: 706891 SRS UD		ASSEMBLY: DS360 LOW DISTORTION FUNCTION GENERATOR	
		TITLE: RACKMOUNT	
SIZE C	SRS REF# DS360-5	SRS PART# 7-00565-720	REV 0
DRAWN BY: JG	SCALE: 1:2	DATE: 4/2/93	SHEET 1 OF 1